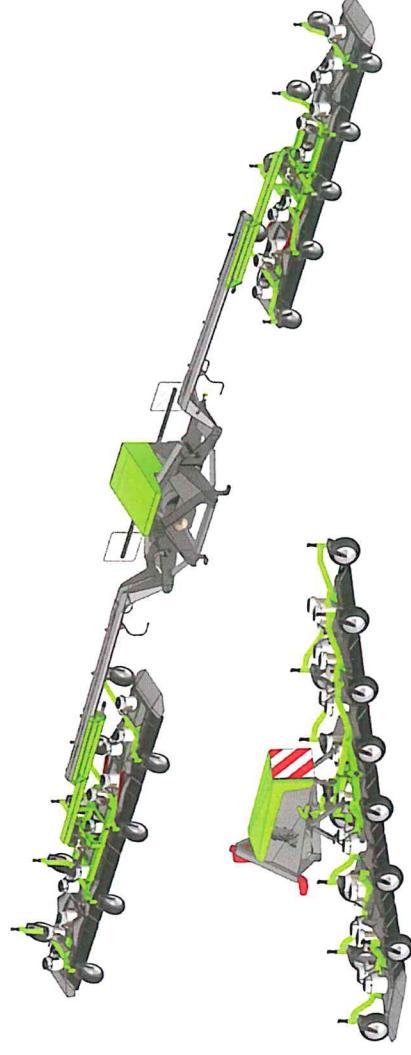


eco clipper® mowers are the *economical solution* for mowing large area turfgrass:

- High quality finish
- High capacity
- Contour following
- Cutting height: 20 till 90 mm
- Minimal soil compaction
- Good dispersion of clippings
- Insensitive for wheater conditions
- Efficient electric drive
- Low noise
- Low in maintenance
- Built with experience



eco clipper® triple combination of EC-FM6 + EC-RM14, In total 14 m cutting width

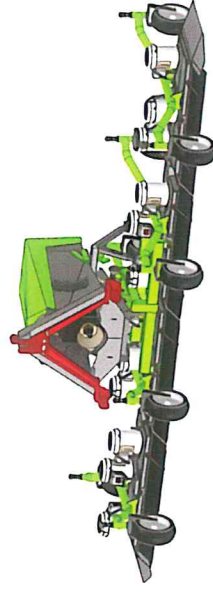
Based on our flexibly linked, 3 rotary blades mowing modules of 106 cm wide, we offer different versions of a triple type 3 point hitch attached combination mower from 8 m up till 14 m cutting width.

All these eco clipper® mowers leave a high quality finish and are contour following, enabling cutting heights from 20 mm till 90 mm. Mowing capacity is high with speeds from 12 km/h till 25 km/h depending on conditions.

The eco clipper® mowers are light weight on large tyres, which minimizes soil compaction and enables faster grass root development. The side decks can be shifted in order to change trails.

What's more is that the mowing result is not very sensitive to wheater conditions. This means that the mowing can be planned to follow the growing of the grass. The removal of excessive clippings after wet periods can be minimized.

That is why eco clipper® mowers are the economical solution for mowing large area turfgrass.



eco clipper® EC-FM4, 4 m cutting width

LS Products BV, Huijsterheide 28,
8521 ND Sint Nicolaasga. T. +31 646 753560
www.ecoclipper.com, info@ecoclipper.com


eco clipper® is a registered trade mark of Leijenaar Solutions

eco clipper®

Which cutting width suits you best?

**EC-FM4**


Cutting width: 411 cm
 Transport width: 240 cm
 Weight: 750 kg (incl own generator)
 Advised tractor: 60 hp (for front mower alone)

**EC-RM8**

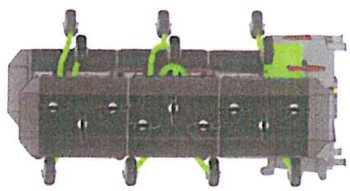
Cutting width: 800 cm
 Side decks: 207 cm
 Side shift decks: optional
 Transport width: 265 cm
 Weight: 850 kg
 Advised tractor: 100 hp (for total combination)

**EC-FM6**

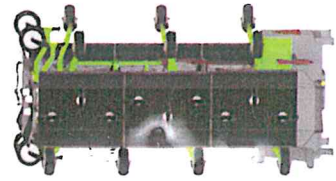
Cutting width: 615 cm
 Transport width: 240 cm
 Weight: 980 kg (incl own generator)
 Advised tractor: 80 hp (for front mower alone)

**EC-RM12/6**

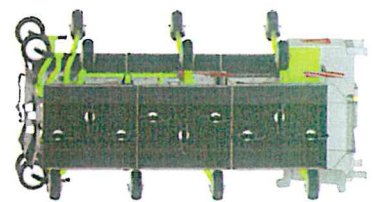
Cutting width: 1206 cm
 Side decks: 309 cm
 Side shift decks: 150 cm
 Transport width: 265 cm
 Weight: 1250 kg
 Advised tractor: 140 hp (for total combination)

**EC-RM10**

Cutting width: 1005 cm
 Side decks: 309 cm
 Side shift decks: 50 cm
 Transport width: 265 cm
 Weight: 1200 kg
 Advised tractor: 120 hp (for total combination)

**EC-RM14**

Cutting width: 1411 cm
 Side decks: 411 cm
 Side shift decks: 150 cm
 Transport width: 275 cm
 Weight: 1500 kg
 Advised tractor: 160 hp (for total combination)

**EC-RM12**

Cutting width: 1206 cm
 Transport width: 275 cm
 Side decks: 411 cm
 Side shift decks: 50 cm
 Weight: 1450 kg
 Advised tractor: 140 hp (for total combination)

All rear mounted 3-point hitch models are supplied with side arm collision protection. The front mowers are supplied with a quick hitch adapter.

The front mower can be supplied with its own generator, enabling independent use, or without generator for tractors without front PTO.

We reserve the right to change specifications without prior notice. eco clipper® is a registered trade mark of Leijenaar Solutions. See also www.ecoclipper.com.